



the other world of sport fishing ®

### X-Squad 1000m

Code 030-65

5 SPOOLS  
PACK

Code	Sizes	Tensile Strengths
030-65-014	0.148mm	2.750kg
030-65-016	0.165mm	3.700kg
030-65-018	0.181mm	4.500kg
030-65-020	0.203mm	5.400kg
030-65-025	0.261mm	8.450kg
030-65-030	0.309mm	11.950kg
030-65-035	0.350mm	15.700kg
030-65-040	0.405mm	20.500kg



### S-Fever 1000m

Code 030-66

5 SPOOLS  
PACK

Code	Sizes	Tensile Strengths
030-66-014	0.148mm	2.750kg
030-66-016	0.165mm	3.700kg
030-66-018	0.181mm	4.500kg
030-66-020	0.203mm	5.400kg
030-66-025	0.261mm	8.450kg
030-66-030	0.309mm	11.950kg
030-66-035	0.350mm	15.700kg
030-66-040	0.405mm	20.500kg



**Fluorocarbon 100% PRO-X 50m**

Code 030-17-\*

10 SPOOLS PACK

Code	Sizes	Tensile Strengths
030-17-008	0.08mm	0.790kg
030-17-010	0.10mm	1.120kg
030-17-012	0.12mm	1.840kg
030-17-014	0.14mm	2.080kg
030-17-016	0.16mm	2.930kg
030-17-018	0.18mm	3.410kg
030-17-020	0.20mm	3.920kg
030-17-022	0.22mm	4.350kg
030-17-025	0.25mm	5.700kg
030-17-028	0.28mm	6.340kg
030-17-030	0.30mm	6.950kg
030-17-035	0.35mm	7.400kg
030-17-040	0.40mm	7.830kg



Aluminium Label and Hard protecting case

**!** Fluorocarbon of last generation produced with UNIPLUS Japan copolymers, with high knot strength. Recommended for making leaders.


Use in fresh water	<input type="checkbox"/>	Resistance to Abrasion	<input type="checkbox"/>
Use in salt water	<input type="checkbox"/>	Tensile Strength	<input type="checkbox"/>
Camouflage qualities	<input type="checkbox"/>	Casting qualities	<input type="checkbox"/>
Elongation	<input type="checkbox"/>	Smoothness	<input type="checkbox"/>

**V-Max 100m**

Code 030-25-\*

10 CONNECTED SPOOL PACK

Code	Sizes	Tensile Strengths
030-25-014	0.14mm	2.100kg
030-25-016	0.16mm	2.750kg
030-25-018	0.18mm	3.350kg
030-25-020	0.20mm	4.100kg
030-25-022	0.22mm	5.000kg
030-25-025	0.25mm	5.900kg
030-25-028	0.28mm	7.430kg
030-25-030	0.30mm	8.950kg
030-25-035	0.35mm	10.600kg
030-25-040	0.40mm	13.600kg
030-25-045	0.45mm	16.400kg
030-25-050	0.50mm	21.300kg



**!** Developed for leisure allround fishing. It offers good performances in terms of strength and castability. An allround line made with Mitsubishi copolymers offered to a wide share of fishing fans.

Use in fresh water	<input type="checkbox"/>	Resistance to Abrasion	<input type="checkbox"/>
Use in salt water	<input type="checkbox"/>	Tensile Strength	<input type="checkbox"/>
Camouflage qualities	<input type="checkbox"/>	Casting qualities	<input type="checkbox"/>
Elongation	<input type="checkbox"/>	Smoothness	<input type="checkbox"/>

**Taper Leader Red**

Code	Ø mm
A30-61-018	15mt x 5 leaders 0,18mm to 0,45mm 10 spools pack
A30-61-020	15mt x 5 leaders 0,20mm to 0,57mm 10 spools pack
A30-61-023	15mt x 5 leaders 0,23mm to 0,57mm 10 spools pack
A30-61-026	15mt x 5 leaders 0,26mm to 0,57mm 10 spools pack



**!** Specific monofilament developed for the classic "bolognese" fishing style. It allows the angler to longer and more accurate casts and to fast strikes even at long distance, thanks the short elongation. Tested also for sea fishing from pier points.

### Reel Pro-X 150m

Code 030-29-\*

10 SPOOLS PACK

Code	Sizes	Tensile Strengths
030-29-012	0.12mm	2.000kg
030-29-014	0.14mm	2.750kg
030-29-016	0.16mm	3.700kg
030-29-018	0.18mm	4.500kg
030-29-020	0.20mm	5.400kg
030-29-022	0.22mm	6.930kg
030-29-025	0.25mm	8.450kg



Use in fresh water	<input type="checkbox"/>
Use in salt water	<input type="checkbox"/>
Camouflage qualities	<input type="checkbox"/>
Elongation	<input type="checkbox"/>
Resistance to Abrasion	<input type="checkbox"/>
Tensile Strength	<input type="checkbox"/>
Casting qualities	<input type="checkbox"/>
Smoothness	<input type="checkbox"/>




### Fluoro Blue Force Fluorine 150m

Code 030-01-\*

10 SPOOLS PACK

Code	Sizes	Tensile Strengths
030-01-012	0.12mm	2.000kg
030-01-014	0.14mm	2.750kg
030-01-016	0.16mm	3.700kg
030-01-018	0.18mm	4.500kg
030-01-020	0.20mm	5.400kg
030-01-022	0.22mm	6.900kg
030-01-025	0.25mm	8.450kg
030-01-028	0.28mm	10.200kg
030-01-030	0.30mm	11.950kg

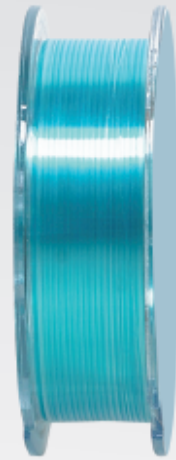

Use in fresh water	<input type="checkbox"/>	Resistance to Abrasion	<input type="checkbox"/>
Use in salt water	<input type="checkbox"/>	Tensile Strength	<input type="checkbox"/>
Camouflage qualities	<input type="checkbox"/>	Casting qualities	<input type="checkbox"/>
Elongation	<input type="checkbox"/>	Smoothness	<input type="checkbox"/>

### Strike One 150m

Code 030-43-\*

10 SPOOLS PACK

ALU BAG

DUO COLOR

Code	Sizes	Tensile Strengths
030-43-016	0.16mm	3.700kg
030-43-018	0.18mm	4.500kg
030-43-020	0.20mm	5.400kg
030-43-022	0.22mm	6.900kg
030-43-025	0.25mm	8.450kg




HYDRO REPELLENT PITCH SYSTEM

Recommended for Spinners



Use in fresh water	<input type="checkbox"/>	Resistance to Abrasion	<input type="checkbox"/>
Use in salt water	<input type="checkbox"/>	Tensile Strength	<input type="checkbox"/>
Camouflage qualities	<input type="checkbox"/>	Casting qualities	<input type="checkbox"/>
Elongation	<input type="checkbox"/>	Smoothness	<input type="checkbox"/>



- PITCH SYSTEM eliminates the water absorption and effectively repels the water off the monofilament during the fishing action.
- BLACK FLUO dipping treatment offers the 200% visibility comparing any other monofilament, maintaining the visibility into the water near to ZERO.
- The new NT/HT 70 quality nylon polymers are unique from Awa-Shima and features ZERO memory, performing straight and more accurate casts.
- The special qualities of this monofilament allow to a more accurate and direct lure drive. The knot strength and overall traction resistance are superior to any other monofilament you have ever experienced.



**Pike Missile 150m**

10 SPOOLS PACK

Code 030-12-\*

Code	Sizes	Tensile Strengths
030-12-016	0.16mm	3.700kg
030-12-018	0.18mm	4.500kg
030-12-020	0.20mm	5.400kg
030-12-022	0.22mm	6.850kg
030-12-025	0.25mm	8.450kg
030-12-028	0.28mm	10.200kg
030-12-030	0.30mm	11.950kg



Use in fresh water	<input type="text"/>	Resistance to Abrasion	<input type="text"/>
Use in salt water	<input type="text"/>	Tensile Strength	<input type="text"/>
Camouflage qualities	<input type="text"/>	Casting qualities	<input type="text"/>
Elongation	<input type="text"/>	Smoothness	<input type="text"/>

**Match Sinkfast 150m**

10 SPOOLS PACK

Code 030-16-\*

Code	Sizes	Tensile Strengths
030-16-012	0.12mm	2.000kg
030-16-014	0.14mm	2.750kg
030-16-016	0.16mm	3.700kg
030-16-018	0.18mm	4.500kg
030-16-020	0.20mm	5.400kg



Use in fresh water	<input type="text"/>	Resistance to Abrasion	<input type="text"/>
Use in salt water	<input type="text"/>	Tensile Strength	<input type="text"/>
Camouflage qualities	<input type="text"/>	Casting qualities	<input type="text"/>
Elongation	<input type="text"/>	Smoothness	<input type="text"/>

**!** Specific monofilament for waggler fishing. The high sinking qualities allows to bring the line quicker under the surface and put the angler on fishing faster. Low stretch for fast strikes.

**Bass Competition 150m**

Code 030-07-\*

5 SPOOLS PACK

HYDRO REPELLENT PITCH SYSTEM

Code	Sizes	Tensile Strengths
030-07-016	0.16mm	3.950kg
030-07-018	0.18mm	4.900kg
030-07-020	0.20mm	5.850kg
030-07-022	0.22mm	6.100kg
030-07-025	0.25mm	8.750kg
030-07-028	0.28mm	10.250kg
030-07-030	0.30mm	12.300kg
030-07-035	0.35mm	16.100kg
030-07-040	0.40mm	20.900kg
030-07-045	0.45mm	27.800kg



**!** Aluminium bag that protects the line from sun rays and also pre-preserved the Pitch System coating by a special inert gas sealed in-side the bag.

Use in fresh water	<input type="text"/>	Resistance to Abrasion	<input type="text"/>
Use in salt water	<input type="text"/>	Tensile Strength	<input type="text"/>
Camouflage qualities	<input type="text"/>	Casting qualities	<input type="text"/>
Elongation	<input type="text"/>	Smoothness	<input type="text"/>





**Classic Competition**

Code 030-33-\* 300m

5 SPOOLS PACK

10 SPOOLS PACK

Code 030-32-\* 150m

Code	Sizes	Tensile Strengths
030-32-018	0.18mm	4.500kg
030-32-020	0.20mm	5.400kg
030-32-022	0.22mm	6.900kg
030-32-025	0.25mm	8.450kg
030-32-028	0.28mm	10.200kg
030-32-030	0.30mm	11.950kg
030-32-035	0.35mm	15.700kg
030-32-040	0.40mm	20.500kg
030-32-045	0.45mm	27.400kg
030-32-050	0.50mm	34.700kg

Code	Sizes	Tensile Strengths
030-33-014	0.14mm	2.750kg
030-33-016	0.16mm	3.700kg
030-33-018	0.18mm	4.500kg
030-33-020	0.20mm	5.400kg
030-33-022	0.22mm	6.900kg
030-33-025	0.25mm	8.450kg
030-33-028	0.28mm	10.200kg
030-33-030	0.30mm	11.950kg
030-33-035	0.35mm	15.700kg
030-33-040	0.40mm	20.500kg
030-33-045	0.45mm	27.400kg
030-33-050	0.50mm	34.700kg

Use in fresh water

Use in salt water

Camouflage qualities

Elongation

Resistance to Abrasion

Tensile Strength

Casting qualities

Smoothness

**Red ISO Fluorine 300m**

NEW

5 SPOOLS PACK

Code 030-62-\*

Code	Sizes	Tensile Strengths
030-62-014	0.14mm	2.750kg
030-62-016	0.16mm	3.700kg
030-62-018	0.18mm	4.500kg
030-62-020	0.20mm	5.400kg
030-62-022	0.22mm	6.850kg
030-62-025	0.25mm	8.450kg
030-62-028	0.28mm	10.500kg
030-62-030	0.30mm	11.950kg
030-62-035	0.35mm	15.700kg
030-62-040	0.40mm	20.500kg
030-62-045	0.45mm	27.400kg
030-62-050	0.50mm	34.700kg



Use in fresh water

Use in salt water

Camouflage qualities

Elongation

Resistance to Abrasion

Tensile Strength

Casting qualities

Smoothness

**S-Missile Fluo**

5 SPOOLS PACK

Code 030-08-\* 300m

Use in fresh water

Use in salt water

Camouflage qualities

Elongation

Resistance to Abrasion

Tensile Strength

Casting qualities

Smoothness

Code	Sizes	Tensile Strengths
030-08-018	0.18mm	4.500kg
030-08-020	0.20mm	5.400kg
030-08-022	0.22mm	6.900kg
030-08-025	0.25mm	8.450kg
030-08-028	0.28mm	10.200kg
030-08-030	0.30mm	11.950kg
030-08-035	0.35mm	15.700kg
030-08-040	0.40mm	20.500kg
030-08-045	0.45mm	27.400kg
030-08-050	0.50mm	34.700kg



S-Missile line is one of the few lines in the world that reacts to the direct UVA light glowing like a neon tube. This quality makes the S-Missile a perfect line for night fishing as it is much easier to see where the line is during the fight.





**Fluorosurf 300m**

**NEW**

**ION®**

Code 030-49-\*

**5 SPOOLS  
PACK**

Code	Sizes	Tensile Strengths
030-49-012	0.12mm	2.200kg
030-49-014	0.14mm	2.750kg
030-49-016	0.16mm	3.700kg
030-49-018	0.18mm	4.500kg
030-49-020	0.20mm	5.400kg
030-49-022	0.22mm	6.900kg
030-49-025	0.25mm	8.450kg
030-49-028	0.28mm	10.200kg
030-49-030	0.30mm	11.950kg
030-49-035	0.35mm	15.700kg
030-49-040	0.40mm	20.500kg

Use in fresh water

Use in salt water

Camouflage qualities

Elongation

Resistance to Abrasion

Tensile Strength

Casting qualities

Smoothness



**Special Dorada**

Code 030-31-\* 300m

**5 SPOOLS  
PACK**

Code	Sizes	Tensile Strengths
030-31-016	0.16mm	3.700kg
030-31-018	0.18mm	4.500kg
030-31-020	0.20mm	5.400kg
030-31-022	0.22mm	6.900kg
030-31-025	0.25mm	8.450kg
030-31-028	0.28mm	10.200kg
030-31-030	0.30mm	11.950kg
030-31-035	0.35mm	15.700kg
030-31-040	0.40mm	20.500kg
030-31-045	0.45mm	27.400kg
030-31-050	0.50mm	34.700kg

Use in fresh water

Use in salt water

Camouflage qualities

Elongation

Resistance to Abrasion

Tensile Strength

Casting qualities

Smoothness



**C+ Hyper Casting**

Code 030-54-\* 0.14 / 0.40mm 300m

**5 SPOOLS  
PACK**

Code	Sizes	Tensile Strengths
030-54-014	0.14mm	2.750kg
030-54-016	0.16mm	3.700kg
030-54-018	0.18mm	4.500kg
030-54-020	0.20mm	5.400kg
030-54-022	0.22mm	6.900kg
030-54-025	0.25mm	8.450kg
030-54-028	0.28mm	10.200kg
030-54-030	0.30mm	11.950kg
030-54-035	0.35mm	15.700kg
030-54-040	0.40mm	20.500kg



### Monster 300m

Code 030-50-\*

5 SPOOLS PACK

Code	Sizes	Tensile Strengths
030-50-045	0.45mm	27.400kg
030-50-050	0.50mm	34.700kg
030-50-060	0.60mm	40.300kg
030-50-070	0.70mm	51.500kg
030-50-080	0.80mm	63.500kg

\* size 0,80mm 260mt

ION POWER



Use in fresh water

Use in salt water

Camouflage qualities

Elongation

Resistance to Abrasion

Tensile Strength

Casting qualities

Smoothness


### Karpum Feeder 300m

NEW

10 SPOOLS PACK

Code 030-21

Code	Size	Tensile Strengths
030-21-018	0.18	4.600 kg
030-21-020	0.20	5.500 kg
030-21-023	0.23	7.100 kg
030-21-026	0.26	8.600 kg
030-21-028	0.28	10.100 kg
030-21-031	0.31	12.100 kg

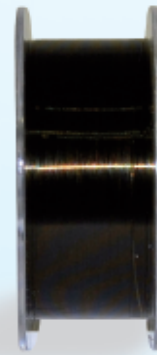

Resistance to Abrasion

Tensile Strength

Casting qualities

Smoothness



### ISO Professional Fluorine 250m

10 SPOOLS PACK

Code 030-02-\*

Code	Sizes	Tensile Strengths
030-02-014	0.14mm	2.750kg
030-02-016	0.16mm	3.700kg
030-02-018	0.18mm	4.500kg
030-02-020	0.20mm	5.400kg
030-02-025	0.25mm	8.450kg
030-02-030	0.30mm	11.950kg
030-02-035	0.35mm	15.700kg
030-02-040	0.40mm	20.500kg
030-02-045	0.45mm	27.400kg
030-02-050	0.50mm	34.700kg
030-02-060	0.60mm	40.300kg
030-02-070	0.70mm	51.500kg
030-02-080	0.80mm	63.500kg

Use in fresh water

Use in salt water

Camouflage qualities

Elongation

Resistance to Abrasion

Tensile Strength

Casting qualities

Smoothness

### Fluor-X Special Competition 250m

NEW

Code 030-47-\*

Code	Sizes	Tensile Strengths
030-47-016	0.16 mm	3.700 kg
030-47-018	0.18 mm	4.500 kg
030-47-020	0.20 mm	5.400 kg
030-47-022	0.22 mm	6.900 kg
030-47-025	0.25 mm	8.450 kg
030-47-028	0.28 mm	10.200 kg
030-47-030	0.30 mm	11.950 kg
030-47-035	0.35 mm	15.700 kg
030-47-040	0.40 mm	20.500 kg
030-47-045	0.45 mm	27.400 kg
030-47-050	0.50 mm	34.700 kg
030-47-060	0.60 mm	40.300 kg
030-47-070	0.70 mm	65.500 kg

10 SPOOLS PACK

Use in fresh water

Use in salt water

Camouflage qualities

Elongation

Resistance to Abrasion

Tensile Strength

Casting qualities

Smoothness





**Craig Neil Carp Stalker 2 x 300m**

Code 030-58-\*

**DUAL COLOR**



**!** Special Mitsubishi Novamid NT 70 polymer developed for carp fishing. Excellent smoothness and high knot resistance. Dual color for best camo and visibility in any light conditions.

Code	Sizes	Tensile Strengths
030-58-022	0.22mm	6.100kg
030-58-025	0.25mm	8.450kg
030-58-028	0.28mm	10.250kg
030-58-030	0.30mm	11.950kg
030-58-033	0.33mm	15.900kg
030-58-037	0.37mm	19.500kg
030-58-040	0.40mm	23.200kg

Use in fresh water

Use in salt water

Camouflage qualities

Elongation

Resistance to Abrasion

Tensile Strength

Casting qualities

Smoothness

**Browny Carp 1200m**

**NEW**

Code 030-22-\*

**6 SPOOLS PACK**

Code	Sizes	Tensile Strengths	Power
030-22-025	0.25mm	8.400kg	17.6 lbs
030-22-028	0.28mm	9.850kg	20.7 lbs
030-22-030	0.30mm	11.900kg	25.1 lbs
030-22-032	0.32mm	15.900kg	33.4 lbs
030-22-035	0.35mm	21.100kg	44.4 lbs



**!** This monofilament has been developed for the use in fresh waters for carp fishing. Very high abrasion resistance.

Use in fresh water

Use in salt water

Camouflage qualities

Elongation

Resistance to Abrasion

Tensile Strength

Casting qualities

Smoothness

**Big Game 1000m**

**NEW**

Code 030-59-\*

**6 SPOOLS PACK**

Code	Sizes	Tensile Strengths
030-59-035	0.35mm	21.500kg
030-59-040	0.40mm	27.900kg
030-59-045	0.45mm	36.000kg
030-59-050	0.50mm	40.900kg
030-59-060	0.60mm	51.500kg
030-59-080	0.80mm	59.300kg
030-59-100	1.00mm	65.700kg
030-59-120	1.20mm	70.500kg



Use in fresh water

Use in salt water

Camouflage qualities

Elongation

Resistance to Abrasion

Tensile Strength

Casting qualities

Smoothness

**Big Game Red 1000m**

**NEW**

Code 030-63-\*

**6 SPOOLS PACK**

Code	Sizes	Tensile Strengths
030-63-035	0.35mm	21.500kg
030-63-040	0.40mm	27.900kg
030-63-045	0.45mm	36.000kg
030-63-050	0.50mm	40.900kg
030-63-060	0.60mm	51.500kg
030-63-080	0.80mm	59.300kg
030-63-100	1.00mm	65.700kg
030-63-120	1.20mm	70.500kg



Use in fresh water

Use in salt water

Camouflage qualities

Elongation

Resistance to Abrasion

Tensile Strength

Casting qualities

Smoothness




**Fluoro Spin 150m**

**NEW**

**10 SPOOLS PACK**

**Code 030-48**

Code	Size	Tensile Strengths
030-48-018	0.18	4.500 kg
030-48-020	0.20	5.400 kg
030-48-022	0.22	6.400 kg
030-48-025	0.25	8.450 kg
030-48-028	0.28	10.200 kg
030-48-030	0.30	11.950 kg



Resistance to Abrasion  Casting qualities   
 Tensile Strength  Smoothness

**Fluo + Coral 2x300m**

**NEW**

**5 SPOOLS PACK**

**Code 030-41**

Code	Size	Tensile Strengths
030-41-018	0.18	4.500 kg
030-41-020	0.20	5.090 kg
030-41-023	0.23	7.100 kg
030-41-026	0.26	8.950 kg
030-41-028	0.28	10.970 kg
030-41-030	0.30	12.350 kg
030-41-033	0.33	16.200 kg
030-41-037	0.37	19.900 kg



Resistance to Abrasion  Casting qualities   
 Tensile Strength  Smoothness

**Fluo + Sun 2x300m**

**NEW**

**5 SPOOLS PACK**

**Code 030-40**

Code	Size	Tensile Strengths
030-40-018	0.18	4.500 kg
030-40-020	0.20	5.090 kg
030-40-023	0.23	7.100 kg
030-40-026	0.26	8.950 kg
030-40-028	0.28	10.970 kg
030-40-030	0.30	12.350 kg
030-40-033	0.33	16.200 kg
030-40-037	0.37	19.900 kg



Resistance to Abrasion  Casting qualities   
 Tensile Strength  Smoothness

**Q-Light 150m**

**NEW**

**10 SPOOLS PACK**

**Code 030-11**

Code	Size	Tensile Strengths
030-11-014	0.14	3.350 kg
030-11-016	0.16	4.200 kg
030-11-018	0.18	4.600 kg
030-11-020	0.20	5.500 kg



Resistance to Abrasion  Casting qualities   
 Tensile Strength  Smoothness